# Sonoma Patio Package Design

How-to sheet #535



The Sonoma package offers a warm and comfortable setting for friends and family to gather. With a large open space and an inviting bench that together, welcomes your guests for some open-air dining.

accommodate for design changes,

shipping or breakage.

allanblock.com

## Provided are instructions to build the following:

Posts/Columns Wall Panel Sections Posts/Columns for Bench Seating

### Number of blocks needed for this project:

24 AB Dublin (TOTAL)

2 AB Dublin cut in half

4 AB Dublin cut at raised ring

48 AB York

84 Corner Blocks


32 Wall Caps

6 Post Caps

1 Bench Material

1 - 24 in. x 60 in. (60 cm x 150 cm)

Flexible Concrete Adhesive

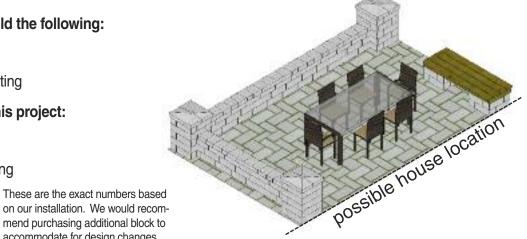

This project is being built on a paver patio that is 12 ft x 19 ft and is 228 ft2 (3.6 m by 5.8 m and 21 m<sup>2</sup>) For information on building the paver patio, see ICPI.org.

#### Blocks used in this project.

**AB Dublin Block** 














Building the Sonoma package will require cutting some blocks. See the <u>Reference Guide for Building with AB Courtyard</u> and <u>How-To Sheet #210</u> for more detailed information.

This project will easily fit in a 12 ft by 19 ft space (3.6 m by 5.8 m). These basic instructions can be modified to fit a different patio size by extending or shortening the wall panel sections. This layout is designed to be built right out from a house. The dimensions (ref.) are to give an overall scope of the project only.

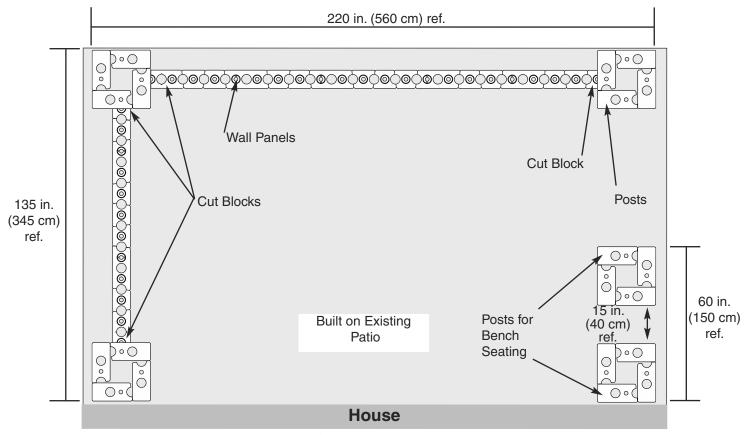


**1st Course Block Layout** 

Some of the tools you will need:

Saw with a diamond blade Gloves
Level Tape Measure
Square Safety Glasses

Some AB Dublin blocks will need to be cut to build this package. They will be referenced as 1-4 in the following pages.



#### Step 1 Install First Post


Start by locating the placement of the first post. The placement of the additional posts can only be done once the wall panels leading up to them are installed. The wall panels will determine their location. This will ensure custom cutting of all blocks does not occur.

Install the first course of the post/column with 4 Corner blocks with the long sides facing out. Then align them with a square making adjustments as needed. Shims can be used to help level the blocks if the existing surface is not level.

Build fifth

Build first

Build last



Install the second course of the post. Place the Corner blocks so that they overlap the blocks beneath them. This pattern will offset the vertical seams.

See <u>How-to sheet #220</u> for more information on building posts/columns.

NOTE: The additional posts as part of this layout cannot be built until the wall panel leading up to them has been built. The wall panel will determine where the next posts will be installed. Building in this order will ensure every block meeting up with the post will not need to be custom cut.



**First Post Course** 




**Second Post Course** 

#### Step 2 Start the Wall Panel

When stacking wall panel sections, building the first 2 courses at the same time will help with proper alignment.


To start the wall panel, cut an AB Dublin at the raised ring to create a 3/4 and 1/4 size cut piece. Install the 3/4 sized block centered on the post with the cut side facing the post to create a finished look.



AB Dublin 3/4 size cut block

Install cut block to start wall panel


Stack 5 AB Yorks and 2 AB Dublin blocks in the pattern selected. Finish the wall panel with the 1/4 size cut block. Place the cut side facing out.

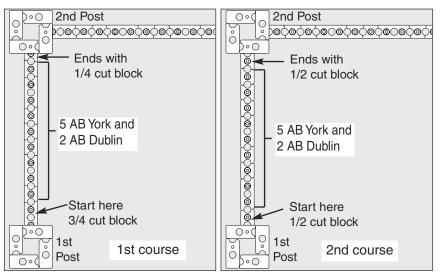





**Build wall panel** 

The 2nd post will now be built at the end of the wall panel. Using 4 Corner blocks install the first course of the post/column with the long sides facing out centered on the wall panel as was done in Step 1. Then align them with a square making adjustments as needed.





Finish with another 1/2 size cut block with the cut side against the 2nd post. Make adjustments as needed to ensure the blocks have a clean finish at the posts.




Place a cut block at next post location



**Second Course Wall Panel** 


#### Step 3 Wall Panel and 3rd Post on the Back Wall

Using the same process as Step 2, build the back wall. Start with a 3/4 sized cut AB Dublin block, with the cut side placed centered against the post. Then place 11 AB York and 4 AB Dublin in the pattern below or one chosen. At the end, place the 1/4 sized cut block, with the cut side facing out to meet up with the 3rd post location.

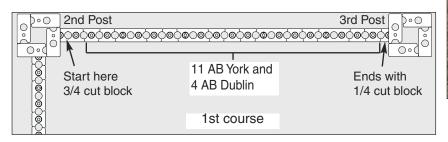



**Install Additional Post Courses** 



The 3rd post will now be built at the of the wall panel. Using 4 Corner blocks install the first course of the post/column with the long sides facing out centered on the wall panel as was done in Step 1. Then align them with a square making adjustments as needed.

Install the second course of the post offsetting the vertical seams from the course below.

Install the second course of the wall panel between the second and third posts. Cut another AB Dublin Block, this time in half. Place the cut side against the side of the post. Then using the 2nd course pattern or the pattern chosen, stack 11 AB York and 4 AB Dublin blocks to build this section.

Finish with another 1/2 size cut block with the cut side against the 3rd post. Make adjustments as needed to ensure the blocks meet up tight and have a clean finish at the posts.

#### Step 4 Build up the Courses

With two courses of the wall panel in place, starting with the posts, stack up 3 additional courses of Corner blocks to raise the height on all three of the posts. Install each course with the long side facing out and the vertical seams offset from the course below.

Using the same process, stack the 3rd course of the wall panels in the pattern chosen. Start with a cut block and finish with a cut block. This example uses the same layout as pattern 1 with the cut blocks placed on opposite ends.



#### Step 5 Capping


Finish each post/column with two Post Caps. To secure the Post Caps in place, apply a bead of flexible concrete adhesive along the outside edge of the top course of Corner blocks and then set the Post Caps in place.


Finish each wall panel with Wall Caps. Starting at one post and working along the wall. At each post location a wall cap may need to be custom cut to fit the space and to create a flat side for a finished look.

Secure the Wall Caps in place with a bead of flexible concrete adhesive running along both sides of the raised rings on the top course of blocks and on the sides of each Wall Cap where the Wall Caps meet up with each other.

See <u>How-to sheet #210</u> for more information on cutting blocks and caps.










#### Step 6 Layout - First Bench Post

At the location of the bench, install the first course of the post/column with 4 corner blocks with the long sides facing out using one of the patterns below. Then align them with a square making adjustments as needed. Shims can be used to help level the blocks if the existing surface is not level.

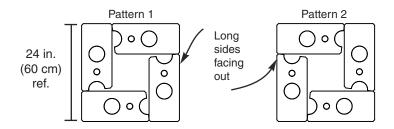





Layout

#### Step 7 Second Bench Post

To determine the location of the 2nd post, measure out the distance of the bench material to be used. Install the next 4 corner blocks at this location in one of the patterns shown.

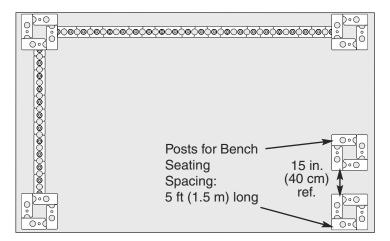



**Second Post Course** 

# Pattern 1 Pattern 2 Pattern 1


**Third Post Course** 

#### Step 8 Additional Courses

Install the second and third courses of both posts alternating between the patterns. Place the corner blocks so that they overlap the blocks beneath them. This pattern will offset the vertical seams. Do not stack the blocks up using only one pattern (seams should not create a straight line the full height of the post/column).



Install your selected bench seating material. We used cedar deck boards for the seating shown.

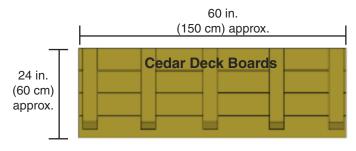



**Install Seating Material**